



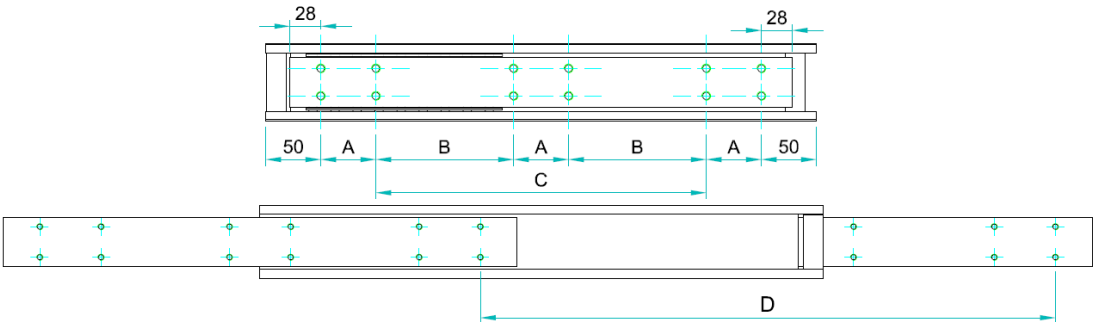

Options:

- "V" - V shape channel raceways
- "F" - one outer beam countersunk
- "FF"- both outer beams countersunk

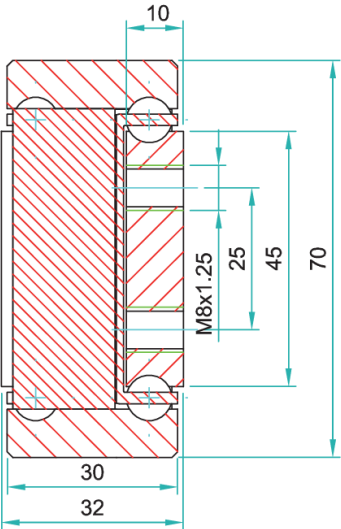

Type: ADTSB-7032 weights 5.5 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
ADTSB7032.0200	200	200	240	50	-	-
ADTSB7032.0250	250	250	250	50	-	50
ADTSB7032.0300	300	300	260	50	-	100
ADTSB7032.0350	350	350	270	50	-	150
ADTSB7032.0400	400	400	280	50	-	200
ADTSB7032.0450	450	450	290	50	-	250
ADTSB7032.0500	500	500	300	50	-	300
ADTSB7032.0550	550	550	315	50	150	-
ADTSB7032.0600	600	600	330	50	175	-
ADTSB7032.0650	650	650	320	50	200	-
ADTSB7032.0700	700	700	310	50	225	-
ADTSB7032.0750	750	750	300	50	250	-
ADTSB7032.0800	800	800	290	50	275	-
ADTSB7032.0850	850	850	280	50	300	-
ADTSB7032.0900	900	900	270	50	325	-
ADTSB7032.0950	950	950	260	50	350	-
ADTSB7032.1000	1000	1000	250	50	375	-
ADTSB7032.1050	1050	1050	240	50	400	-
ADTSB7032.1100	1100	1100	230	50	425	-
ADTSB7032.1150	1150	1150	220	50	450	-
ADTSB7032.1200	1200	1200	210	50	475	-

**Do not dismantle the slide!**

The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
 Flat mounting: Reduce the load by 60-80%.
 We recommend the use of strong L brackets for under or floor mount.
 Deflection is calculated up to 2% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

Type: ADTSB-7032 weights 5.4 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
ADTSB7032.1250	1250	1250	200	50	500	-
ADTSB7032.1300	1300	1300	190	50	525	-
ADTSB7032.1350	1350	1350	180	50	550	-
ADTSB7032.1400	1400	1400	170	50	575	-
ADTSB7032.1450	1450	1450	160	50	600	-
ADTSB7032.1500	1500	1500	155	50	625	-
ADTSB7032.1550	1550	1550	150	50	650	-
ADTSB7032.1600	1600	1600	145	50	675	-
ADTSB7032.1650	1650	1650	140	50	700	
ADTSB7032.1700	1700	1700	135	100	650	
ADTSB7032.1750	1750	1750	130	100	675	
ADTSB7032.1800	1800	1800	125	100	700	
ADTSB7032.1850	1850	1850	120	100	725	
ADTSB7032.1900	1900	1900	115	100	750	
ADTSB7032.1950	1950	1950	110	100	775	
ADTSB7032.2000	2000	2000	105	100	800	

Indirect Axis (Flat) Mounting: As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

Material:

Beams: EN-AW 6082 T6, anodized acc. BS1615 AA10

Ball cages: Stainless Steel 316L (1.4404), Laser cut profiles.

Ball bearings: Stainless Steel 316L (1.4404)

End Bolts: Stainless A2 304 (1.4301)

Surface protection: Anodized to BS 1615 AA10 (max length 1100mm). Lengths 1150mm+ supplied raw, non-anodized.

Maximum temperature: We recommend -40 to +200°C with low/high-temp lubrication and free movement to allow for steel expansion

