



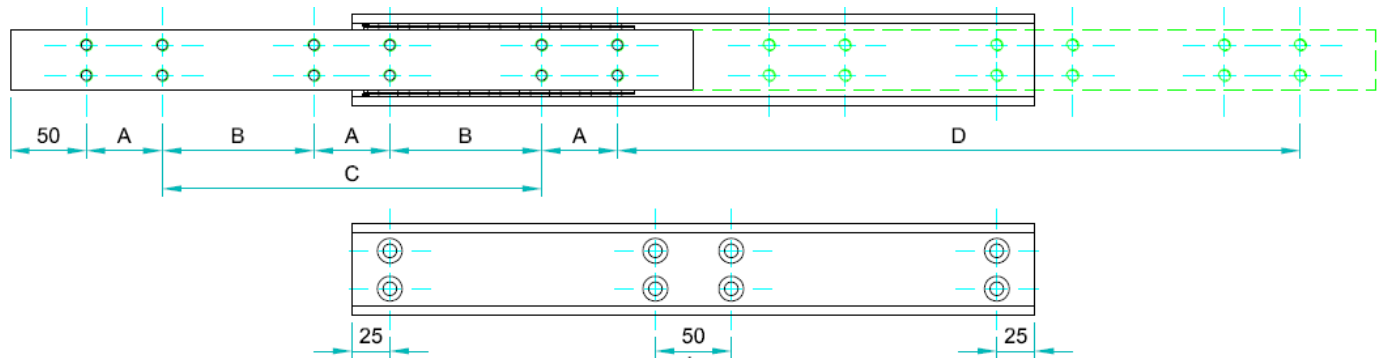

**Options:**

- "H" – Hardened raceways
- "V" - V shape channel raceways
- "F" - one outer beam countersunk
- "SB"- stainless steel ball bearings
- "SC"- stainless steel ball cages
- "SA"- stainless steel stopping pins and bolts

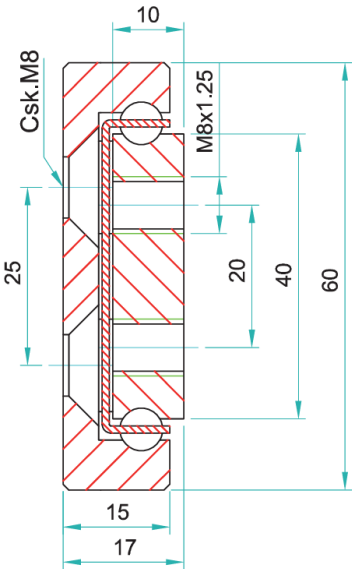

| OWST-6017 weightts 6.9 kg/m |                        |                     |                   | Hole pattern |     |     |
|-----------------------------|------------------------|---------------------|-------------------|--------------|-----|-----|
| Article number              | Installation length: L | Extension length: D | Load per pair: kg | "A"          | "B" | "C" |
| OWST6017.0200               | 200                    | 100                 | 440               | 50           | -   | -   |
| OWST6017.0250               | 250                    | 125                 | 480               | 50           | -   | 50  |
| OWST6017.0300               | 300                    | 150                 | 520               | 50           | -   | 100 |
| OWST6017.0350               | 350                    | 175                 | 560               | 50           | -   | 150 |
| OWST6017.0400               | 400                    | 200                 | 610               | 50           | -   | 200 |
| OWST6017.0450               | 450                    | 225                 | 660               | 50           | -   | 250 |
| OWST6017.0500               | 500                    | 250                 | 710               | 50           | -   | 300 |
| OWST6017.0550               | 550                    | 275                 | 720               | 50           | 150 | -   |
| OWST6017.0600               | 600                    | 300                 | 730               | 50           | 175 | -   |
| OWST6017.0650               | 650                    | 325                 | 740               | 50           | 200 | -   |
| OWST6017.0700               | 700                    | 350                 | 750               | 50           | 225 | -   |
| OWST6017.0750               | 750                    | 375                 | 740               | 50           | 250 | -   |
| OWST6017.0800               | 800                    | 400                 | 720               | 50           | 275 | -   |
| OWST6017.0850               | 850                    | 425                 | 700               | 50           | 300 | -   |
| OWST6017.0900               | 900                    | 450                 | 680               | 50           | 325 | -   |
| OWST6017.0950               | 950                    | 475                 | 660               | 50           | 350 | -   |
| OWST6017.1000               | 1000                   | 500                 | 640               | 50           | 375 | -   |
| OWST6017.1050               | 1050                   | 525                 | 610               | 50           | 400 | -   |
| OWST6017.1100               | 1100                   | 550                 | 580               | 50           | 425 | -   |
| OWST6017.1150               | 1150                   | 575                 | 550               | 50           | 450 | -   |
| OWST6017.1200               | 1200                   | 600                 | 520               | 50           | 475 | -   |

**Do not dismantle the slide!**

The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.  
 Flat mounting: Reduce the load by 60-80%.  
 We recommend the use of strong L brackets for under or floor mount.  
 Deflection is calculated up to 1% of the closed length, at or near full load capacity.

**Installation tolerance:**

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

| OWST-6017 weights 6.9 kg/m |                        |                     |                   | Hole pattern |     |     |
|----------------------------|------------------------|---------------------|-------------------|--------------|-----|-----|
| Article number             | Installation length: L | Extension length: D | Load per pair: kg | "A"          | "B" | "C" |
| OWST6017.1250              | 1250                   | 625                 | 490               | 50           | 500 | -   |
| OWST6017.1300              | 1300                   | 650                 | 480               | 50           | 525 | -   |
| OWST6017.1350              | 1350                   | 675                 | 460               | 50           | 550 | -   |
| OWST6017.1400              | 1400                   | 700                 | 440               | 50           | 575 | -   |
| OWST6017.1450              | 1450                   | 725                 | 420               | 50           | 600 | -   |
| OWST6017.1500              | 1500                   | 750                 | 390               | 50           | 625 | -   |
| OWST6017.1550              | 1550                   | 775                 | 360               | 50           | 650 | -   |
| OWST6017.1600              | 1600                   | 800                 | 340               | 50           | 675 | -   |
| OWST6017.1650              | 1650                   | 825                 | 315               | 50           | 700 | -   |
| OWST6017.1700              | 1700                   | 850                 | 290               | 100          | 650 | -   |
| OWST6017.1750              | 1750                   | 875                 | 275               | 100          | 675 | -   |
| OWST6017.1800              | 1800                   | 900                 | 250               | 100          | 700 | -   |
| OWST6017.1850              | 1850                   | 925                 | 220               | 100          | 725 | -   |
| OWST6017.1900              | 1900                   | 950                 | 190               | 100          | 750 | -   |
| OWST6017.1950              | 1950                   | 975                 | 160               | 100          | 775 | -   |
| OWST6017.2000              | 2000                   | 1000                | 130               | 100          | 800 | -   |

**Indirect Axis (Flat) Mounting:** As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

**Hardened Raceways Option:** Via an accurate laser process, the raceways can be hardened to 58-62HRC without increasing production lead-times. This maximizes tensile strength, reduces friction coefficient, minimizes operational forces and substantially increases the life cycles. Load capacities for lengths under 700mm are marginally increased. Recommended operating speeds increase to 0.6m/s. A non-hardened Professional Range steel slide can be expected to achieve 100,000 cycles at 75% load capacity in a lifetime, following correct mounting, operational speeds, working environment and regular raceway cleaning with a re-lubrication schedule. (Download the Technical Maintenance Document for further information). Hardening raceways to achieve 58-62HRC and replicating the chromed steel ball bearings, results in substantially less wear and prolonged service life. Following the same maintenance schedule and operational conditions, lifespan can be anticipated to surpass 500,000 cycles. Our engineers can support OEM design programs with FEA analysis; however, we recommend in situ testing within the fabrication before committing to production.

**Material:** All steel parts.

**Beams:** Cold drawn carbon steel C45E+C, - EN 10277, milled raceways.

**Ball cages:** Zinc plated sheet steel. Laser cut profiles.

**Ball bearings:** C85, G100: DIN 5401 (Chromed).

**End Bolts:** ASTM A307.

**Steel surface protection:** Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 250 hours. No red rust appearance within 1,100 hours

**Temperature range:** Steel slides –20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion

**Lubrication:** We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request

**Clean Room Requirement:** The slides will be supplied unlubricated for the customer to sterilize and apply specialist grease after production

**Thread pitches:** As per end profile image - coarse

