





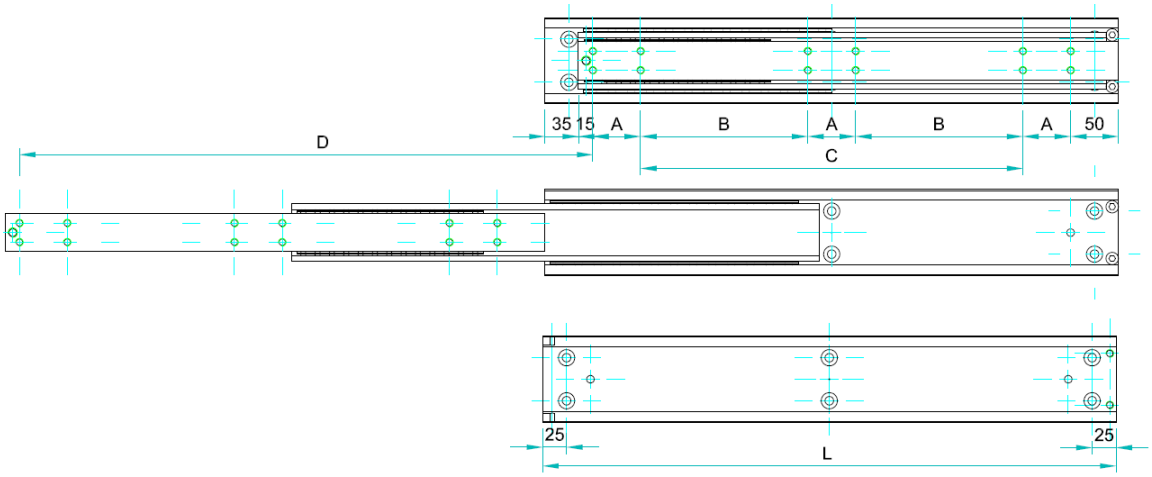

Options:
"**H**" – Hardened raceways
"**V**" - V shape channel raceways
"**SB**"- stainless steel ball bearings
"**SC**"- stainless steel ball cages
"**SA**"- stainless steel stopping pins and bolts

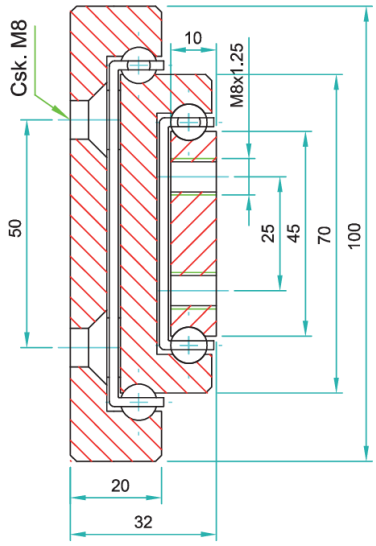

TSR-10032 weights 17.2 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
TSR10032.0300	300	300	820	50	-	100
TSR10032.0350	350	350	860	50	-	150
TSR10032.0400	400	400	900	50	-	200
TSR10032.0450	450	450	940	50	-	250
TSR10032.0500	500	500	960	50	-	300
TSR10032.0550	550	550	980	50	150	-
TSR10032.0600	600	600	1000	50	175	-
TSR10032.0650	650	650	980	50	200	-
TSR10032.0700	700	700	950	50	225	-
TSR10032.0750	750	750	920	50	250	-
TSR10032.0800	800	800	890	50	275	-
TSR10032.0850	850	850	860	50	300	-
TSR10032.0900	900	900	830	50	325	-
TSR10032.0950	950	950	820	50	350	-
TSR10032.1000	1000	1000	800	50	375	-
TSR10032.1050	1050	1050	780	50	400	-
TSR10032.1100	1100	1100	760	50	425	-
TSR10032.1150	1150	1150	740	50	450	-
TSR10032.1200	1200	1200	720	50	475	-

FEDS
TELESCOPIC SLIDES AND LINEAR RAILS



Do not dismantle the slide!
The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
Flat mounting: Reduce the load by 60-80%.
We recommend the use of strong L brackets for under or floor mount.
Deflection is calculated up to 2% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

TSR-10032 weights 17.2 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
TSR10032.1250	1250	1250	700	50	600	-
TSR10032.1300	1300	1300	680	50	625	-
TSR10032.1350	1350	1350	660	50	650	-
TSR10032.1400	1400	1400	640	50	675	-
TSR10032.1450	1450	1450	620	50	700	-
TSR10032.1500	1500	1500	600	50	650	-
TSR10032.1550	1550	1550	580	50	675	-
TSR10032.1600	1600	1600	560	50	700	-
TSR10032.1650	1650	1650	540	50	700	-
TSR10032.1700	1700	1700	520	100	650	-
TSR10032.1750	1750	1750	500	100	675	-
TSR10032.1800	1800	1800	480	100	700	-
TSR10032.1850	1850	1850	460	100	725	-
TSR10032.1900	1900	1900	440	100	750	-
TSR10032.1950	1950	1950	420	100	775	-
TSR10032.2000	2000	2000	400	100	800	-

Indirect Axis (Flat) Mounting: As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

Hardened Raceways Option: Via an accurate laser process, the raceways can be hardened to 58-62HRC without increasing production lead-times. This maximizes tensile strength, reduces friction coefficient, minimizes operational forces and substantially increases the life cycles. Load capacities for lengths under 700mm are marginally increased. Recommended operating speeds increase to 0.6m/s. A non-hardened Professional Range steel slide can be expected to achieve 100,000 cycles at 75% load capacity in a lifetime, following correct mounting, operational speeds, working environment and regular raceway cleaning with a re-lubrication schedule. (Download the Technical Maintenance Document for further information). Hardening raceways to achieve 58-62HRC and replicating the chromed steel ball bearings, results in substantially less wear and prolonged service life. Following the same maintenance schedule and operational conditions, lifespan can be anticipated to surpass 500,000 cycles. Our engineers can support OEM design programs with FEA analysis; however, we recommend in situ testing within the fabrication before committing to production.

Material: All steel parts.
Beams: Cold drawn carbon steel C45E+C, - EN 10277, milled raceways.
Ball cages: Zinc plated sheet steel. Laser cut profiles.
Ball bearings: C85, G100: DIN 5401 (Chromed).
End Bolts: ASTM A307.
Steel surface protection: Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 250 hours. No red rust appearance within 1,100 hours
Temperature range: Steel slides –20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion
Lubrication: We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request
Clean Room Requirement: The slides will be supplied unlubricated for the customer to sterilize and apply specialist grease after production
Thread pitches: As per end profile image - coarse

qualityaustria SYSTEM CERTIFIED ISO 9001:2015 ISO 45001:2018 ISO 14001:2015 REACH RoHS ISO 13485