





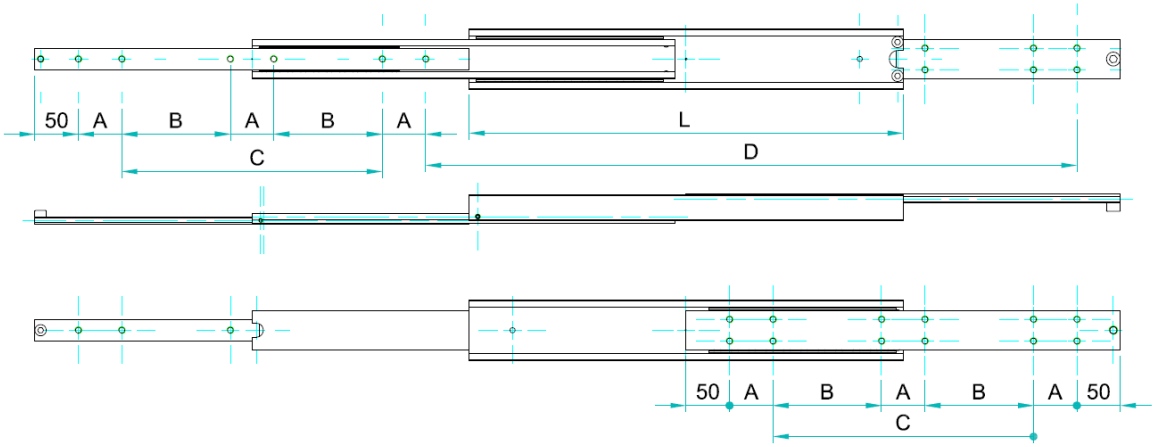

Options:
"**V**" - V shape channel raceways
"**F**" - one outer beam countersunk
"**FF**"- both outer beams countersunk

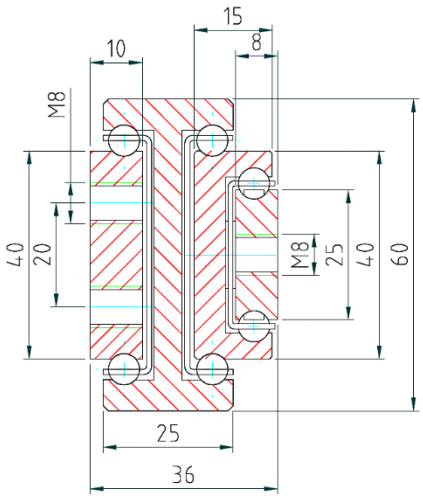

SQSRT-6036 weights 15.6 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
SQSRT6036.0200	200	300	70	50	-	-
SQSRT6036.0250	250	375	80	50	-	50
SQSRT6036.0300	300	450	85	50	-	100
SQSRT6036.0350	350	525	90	50	-	150
SQSRT6036.0400	400	600	100	50	-	200
SQSRT6036.0450	450	675	110	50	-	250
SQSRT6036.0500	500	750	120	50	-	300
SQSRT6036.0550	550	825	130	50	150	-
SQSRT6036.0600	600	900	140	50	175	-
SQSRT6036.0650	650	975	135	50	200	-
SQSRT6036.0700	700	1050	130	50	225	-
SQSRT6036.0750	750	1125	125	50	250	-
SQSRT6036.0800	800	1200	120	50	275	-
SQSRT6036.0850	850	1275	115	50	300	-
SQSRT6036.0900	900	1350	110	50	325	-



Do not dismantle the slide!
The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
Flat mounting: Reduce the load by 60-80%.
We recommend the use of strong L brackets for under or floor mount.
Deflection is calculated up to 2% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

SQSRT-6036 weights 15.6 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
SQSRT6036.1050	1050	1575	95	50	400	-
SQSRT6036.1100	1100	1650	90	50	425	-
SQSRT6036.1150	1150	1725	85	50	450	-
SQSRT6036.1200	1200	1800	80	50	475	-
SQSRT6036.1250	1250	1875	75	50	500	-
SQSRT6036.1300	1300	1950	70	50	525	-
SQSRT6036.1350	1350	2025	68	50	550	-
SQSRT6036.1400	1400	2100	66	50	575	-
SQSRT6036.1450	1450	2175	64	50	600	-
SQSRT6036.1500	1300	2250	62	50	625	-
SQSRT6036.1550	1350	2325	60	50	650	-
SQSRT6036.1600	1400	2400	58	50	675	-

Material: All austenitic stainless-steel parts
Beams: Stainless 316L (1.4404) precision milled
Ball cages: Stainless 316L (1.4404)
Ball bearings: Stainless 316L (1.4404)
End Bolts: Stainless A2 304 (1.4301)
Steel surface protection: Polished
Temperature range: Cryogenic to ≈800° C with suitable lubrication & material yield strength reduction
Lubrication: We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request