


\*Remove the stopping bolt to reach mounting holes

Available Options:

- \* H – Hardened raceways
- \* V – V-shaped channel raceways
- \* SB – Stainless steel ball bearings
- \* SC – Stainless steel ball cages
- \* SA – Stainless steel stopping pins and bolts
- \* S – Entirely manufactured in stainless steel 316L

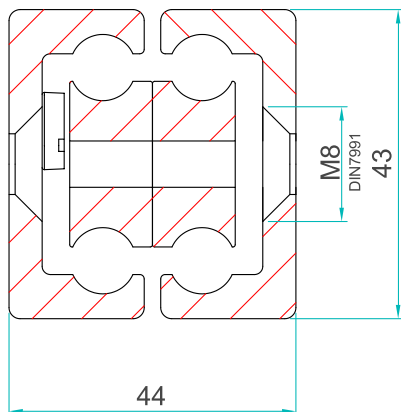

NDOWS4344 - B weighs 10.8 kg/m				No. of holes
Article number	Installation length: L	Extension length: D	Load per pair: kg	
MDOWS4344-B.0210	210	248	130	3
MDOWS4344-B.0290	290	318	230	4
MDOWS4344-B.0370	370	418	265	5
MDOWS4344-B.0450	450	488	270	6
MDOWS4344-B.0530	530	558	250	7
MDOWS4344-B.0610	610	628	230	8
MDOWS4344-B.0690	690	728	210	9
MDOWS4344-B.0770	770	798	200	10
MDOWS4344-B.0850	850	868	180	11
MDOWS4344-B.0930	930	968	165	12
MDOWS4344-B.1010	1010	1038	145	13
MDOWS4344-B.1090	1090	1108	135	14
MDOWS4344-B.1170	1170	1208	130	15
MDOWS4344-B.1250	1250	1278	115	16
MDOWS4344-B.1330	1330	1378	110	17
MDOWS4344-B.1410	1410	1448	105	18
MDOWS4344-B.1490	1490	1518	100	19
MDOWS4344-B.1570	1570	1588	95	20
MDOWS4344-B.1650	1650	1688	90	21
MDOWS4344-B.1730	1730	1758	85	22
MDOWS4344-B.1810	1810	1858	80	23
MDOWS4344-B.1890	1890	1928	75	24
MDOWS4344-B.1970	1970	2028	70	25

### Installation Tolerances

Parameter	Tolerance
Closed Length	DIN 2768-c
Extension	DIN 2768-c
Installation Width	+0.4 mm / -0.6 mm

**Indirect Axis (Flat) Mounting:** When mounting as shown in the image above, reduce the load capacity by approximately 60–80% and account for increased deflection. For precise calculations, please contact our engineering team to request a detailed FEA load analysis tailored for OEM projects. Our standard load ratings are based on fully extended pairs of slides positioned upright (direct axis), uniformly loaded across beams spaced 1,000 mm apart. If higher load capacities are required or slides are intended for extra-wide drawers, please consult our technical support team for further guidance.

**Hardened Raceway Option:** Our raceways can be accurately hardened through an advanced laser process, achieving a hardness rating of 58–62 HRC without extending production lead times. This process significantly enhances tensile strength, reduces friction coefficients, minimizes operational forces, and greatly increases lifecycle performance. Load capacities for slide lengths under 700 mm show marginal improvements. Recommended operational speeds also increase to 0.6 m/s. Under standard conditions, a non-hardened Professional Range steel slide typically achieves approximately 100,000 cycles at 75% load capacity, provided correct installation, appropriate operational speeds, optimal environmental conditions, and adherence to recommended maintenance schedules are maintained (refer to the Technical Maintenance Document for additional information). Hardening the raceways to 58–62 HRC and utilizing chromed steel ball bearings substantially reduces wear and significantly extends service life. With proper maintenance and operational standards, life expectancy can exceed 500,000 cycles. While our engineers can assist OEM design programs with comprehensive FEA analysis, we highly recommend conducting in situ testing within your production facility before finalizing your design for manufacturing.

**Material:** All steel components.

**Beams:** Cold-drawn carbon steel C45E+C (EN 10277), featuring precision-milled raceways.

**Ball Cages:** Zinc-plated steel sheet, laser-cut profiles.

**Ball Bearings:** C85, G100 according to DIN 5401 standards (chromed).

**End Bolts:** ASTM A307 compliant.

**Surface Protection:** Electrolytic alkaline zinc coating (10–12 microns), compliant with DIN EN ISO 9227 neutral salt spray testing—no white rust appearance within 250 hours and no red rust appearance within 1,100 hours.

**Temperature Range:** Suitable for temperatures from -20°C to +250°C, provided proper lubricants are applied and beams are mounted freely to accommodate thermal expansion.

**Lubrication:** We apply and recommend lithium-based EP3 grease for standard applications. Special high- or low-temperature greases are available upon request.

**Clean Room Requirements:** Slides can be delivered unlubricated, allowing customers to perform sterilization and apply specialized greases post-production.

**Thread Pitches:** Coarse, as specified in the end profile image.



### Important Safety Notice

#### Do not disassemble the slide!

The stated maximum safe working load applies to a fully extended pair of slides mounted in the upright position. Ensure all provided fixing holes are utilized, and distribute the load evenly along the inner beam. Slide deflection is calculated at a maximum of 2% of the slide's closed length when operating at or near full load capacity.

