

Professional Bi-Directional Full Extension Telescopic slides

FEDS
TELESCOPIC SLIDES AND LINEAR RAILS

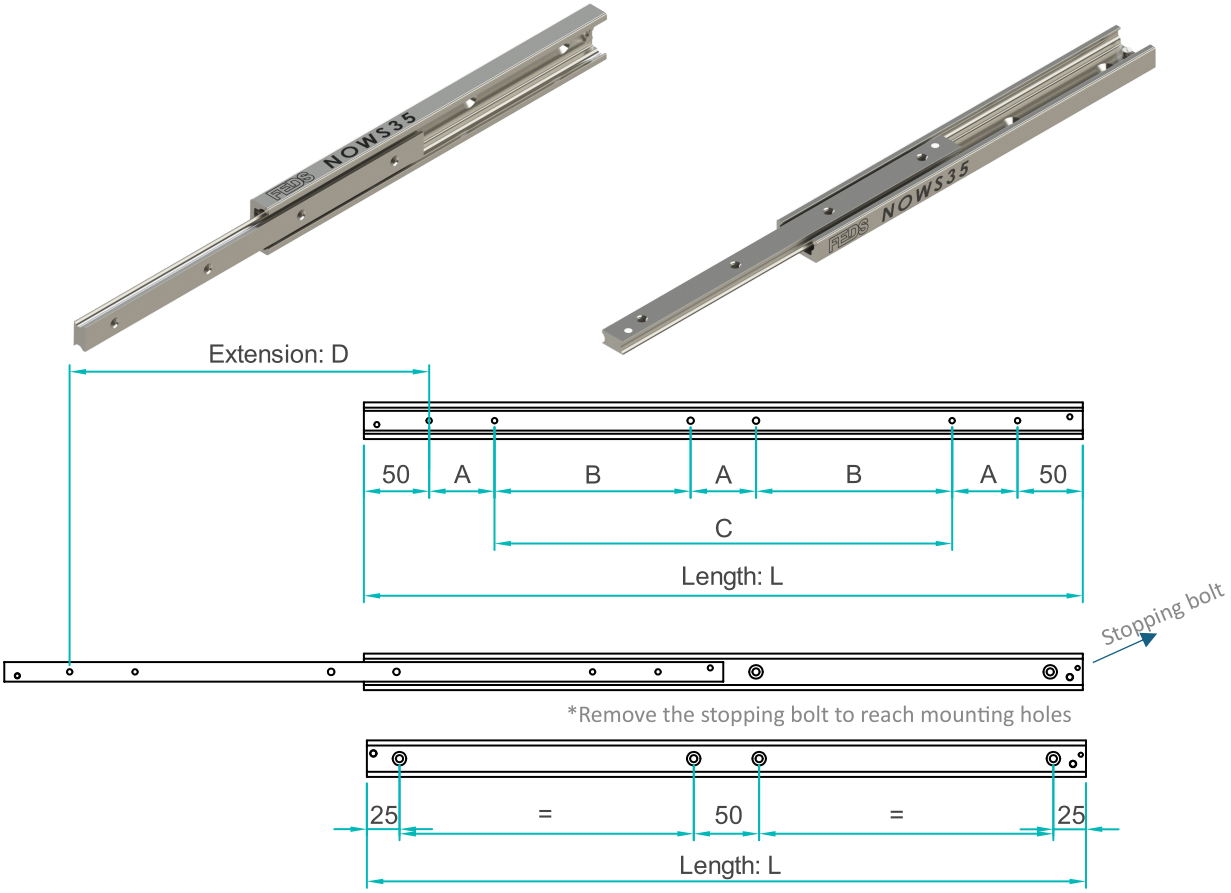

Available Options:

* **H –** Hardened raceways
* **V** – V-shaped channel raceways
* **SB** – Stainless steel ball bearings
* **SC** – Stainless steel ball cages
* **SA** – Stainless steel stopping pins and bolts
* **S** – Entirely manufactured in stainless steel 316L

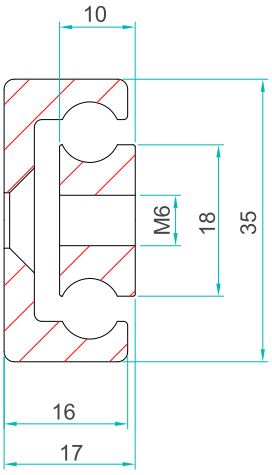

NOWS3517-A weighs 3.4 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
NOWS3517-A.0200	200	100	110	50	-	-
NOWS3517-A.0250	250	125	160	50	-	50
NOWS3517-A.0300	300	150	170	50	-	100
NOWS3517-A.0350	350	175	225	50	-	150
NOWS3517-A.0400	400	200	235	50	-	200
NOWS3517-A.0450	450	225	275	50	-	250
NOWS3517-A.0500	500	250	345	50	-	300
NOWS3517-A.0550	550	275	365	50	150	-
NOWS3517-A.0600	600	300	360	50	175	-
NOWS3517-A.0650	650	325	350	50	200	-
NOWS3517-A.0700	700	350	340	50	225	-
NOWS3517-A.0750	750	375	325	50	250	-
NOWS3517-A.0800	800	400	310	50	275	-
NOWS3517-A.0850	850	425	300	50	300	-
NOWS3517-A.0900	900	450	285	50	325	-
NOWS3517-A.0950	950	475	270	50	350	-
NOWS3517-A.1000	1000	500	255	50	375	-
NOWS3517-A.1050	1050	525	240	50	400	-
NOWS3517-A.1100	1100	550	230	50	425	-
NOWS3517-A.1150	1150	575	215	50	450	-
NOWS3517-A.1200	1200	600	200	50	475	-

Professional Bi-Directional Full Extension Telescopic slides

FEDS
TELESCOPIC SLIDES AND LINEAR RAILS

NOWS3517-A weighs 3.4 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
NOWS3517-A.1250	1250	625	195	50	500	-
NOWS3517-A.1300	1300	650	180	50	525	-
NOWS3517-A.1350	1350	675	165	50	550	-
NOWS3517-A.1400	1400	700	150	50	575	-
NOWS3517-A.1450	1450	725	140	50	600	-
NOWS3517-A.1500	1500	750	125	50	625	-
NOWS3517-A.1550	1550	775	110	50	650	-
NOWS3517-A.1600	1600	800	95	50	675	-

Installation Tolerances

Parameter	Tolerance
Closed Length	DIN 2768–c
Extension	DIN 2768–c
Installation Width	+0.4 mm / –0.6 mm

Indirect Axis (Flat) Mounting: When mounting as shown in the image above, reduce the load capacity by approximately 60–80% and account for increased deflection. For precise calculations, please contact our engineering team to request a detailed FEA load analysis tailored for OEM projects. Our standard load ratings are based on fully extended pairs of slides positioned upright (direct axis), uniformly loaded across beams spaced 1,000 mm apart. If higher load capacities are required or slides are intended for extra-wide drawers, please consult our technical support team for further guidance.

Hardened Raceway Option: Our raceways can be accurately hardened through an advanced laser process, achieving a hardness rating of 58–62 HRC without extending production lead times. This process significantly enhances tensile strength, reduces friction coefficients, minimizes operational forces, and greatly increases lifecycle performance. Load capacities for slide lengths under 700 mm show marginal improvements. Recommended operational speeds also increase to 0.6 m/s. Under standard conditions, a non-hardened Professional Range steel slide typically achieves approximately 100,000 cycles at 75% load capacity, provided correct installation, appropriate operational speeds, optimal environmental conditions, and adherence to recommended maintenance schedules are maintained (refer to the Technical Maintenance Document for additional information).
Hardening the raceways to 58–62 HRC and utilizing chromed steel ball bearings substantially reduces wear and significantly extends service life. With proper maintenance and operational standards, life expectancy can exceed 500,000 cycles. While our engineers can assist OEM design programs with comprehensive FEA analysis, we highly recommend conducting in situ testing within your production facility before finalizing your design for manufacturing.

Material: All steel components.
Beams: Cold-drawn carbon steel C45E+C (EN 10277), featuring precision-milled raceways.
Ball Cages: Zinc-plated steel sheet, laser-cut profiles.
Ball Bearings: C85, G100 according to DIN 5401 standards (chromed).
End Bolts: ASTM A307 compliant.
Surface Protection: Electrolytic alkaline zinc coating (10–12 microns), compliant with DIN EN ISO 9227 neutral salt spray testing—no white rust appearance within 250 hours and no red rust appearance within 1,100 hours.
Temperature Range: Suitable for temperatures from –20°C to +250°C, provided proper lubricants are applied and beams are mounted freely to accommodate thermal expansion.
Lubrication: We apply and recommend lithium-based EP3 grease for standard applications. Special high- or low-temperature greases are available upon request.
Clean Room Requirements: Slides can be delivered unlubricated, allowing customers to perform sterilization and apply specialized greases post-production.
Thread Pitches: Coarse, as specified in the end profile image.

Important Safety Notice

Do not disassemble the slide!
The stated maximum safe working load applies to a fully extended pair of slides mounted in the upright position.Ensure all provided fixing holes are utilized, and distribute the load evenly along the inner beam.Slide deflection is calculated at a maximum of 2% of the slide's closed length when operating at or near full load capacity.

ISO 13485 CERTIFIED
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.10272/0
ISO 45001:2018 No.00944/0
ISO 14001:2015 No.04216/0
REACH COMPLIANT
RoHS