



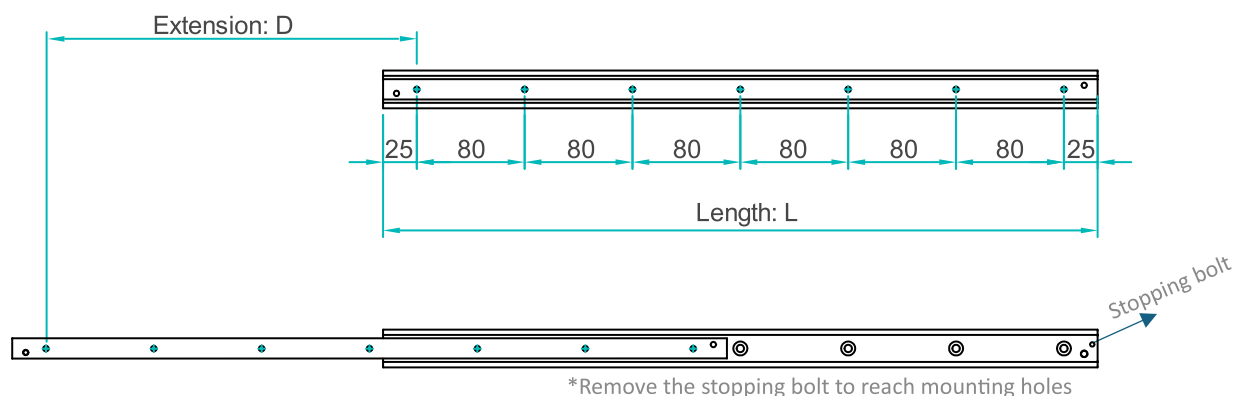

Available Options:

- * **H** – Hardened raceways
- * **V** – V-shaped channel raceways
- * **SB** – Stainless steel ball bearings
- * **SC** – Stainless steel ball cages
- * **SA** – Stainless steel stopping pins and bolts
- * **S** – Entirely manufactured in stainless steel 316L

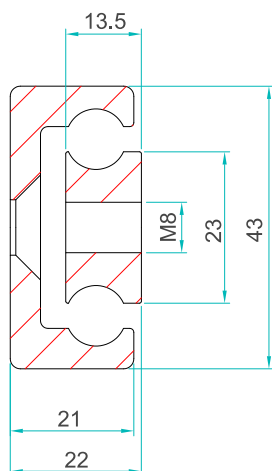

NOWS4322-B weighs 5.5 kg/m				No. of holes
Article number	Installation length: L	Extension length: D	Load per pair: kg	
NOWS4322-B.0210	210	123	140	3
NOWS4322-B.0290	290	158	250	4
NOWS4322-B.0370	370	208	290	5
NOWS4322-B.0450	450	243	370	6
NOWS4322-B.0530	530	278	600	7
NOWS4322-B.0610	610	313	630	8
NOWS4322-B.0690	690	363	610	9
NOWS4322-B.0770	770	398	590	10
NOWS4322-B.0850	850	433	520	11
NOWS4322-B.0930	930	483	490	12
NOWS4322-B.1010	1010	518	475	13
NOWS4322-B.1090	1090	568	450	14
NOWS4322-B.1170	1170	603	440	15
NOWS4322-B.1250	1250	638	425	16
NOWS4322-B.1330	1330	688	410	17
NOWS4322-B.1410	1410	723	400	18
NOWS4322-B.1490	1490	758	370	19
NOWS4322-B.1570	1570	793	340	20
NOWS4322-B.1650	1650	843	310	21
NOWS4322-B.1730	1730	878	290	22
NOWS4322-B.1810	1810	928	260	23
NOWS4322-B.1890	1890	963	230	24
NOWS4322-B.1970	1970	1013	220	25

Installation Tolerances

Parameter	Tolerance
Closed Length	DIN 2768-c
Extension	DIN 2768-c
Installation Width	+0.4 mm / -0.6 mm

Indirect Axis (Flat) Mounting: When mounting as shown in the image above, reduce the load capacity by approximately 60–80% and account for increased deflection. For precise calculations, please contact our engineering team to request a detailed FEA load analysis tailored for OEM projects. Our standard load ratings are based on fully extended pairs of slides positioned upright (direct axis), uniformly loaded across beams spaced 1,000 mm apart. If higher load capacities are required or slides are intended for extra-wide drawers, please consult our technical support team for further guidance.

Hardened Raceway Option: Our raceways can be accurately hardened through an advanced laser process, achieving a hardness rating of 58–62 HRC without extending production lead times. This process significantly enhances tensile strength, reduces friction coefficients, minimizes operational forces, and greatly increases lifecycle performance. Load capacities for slide lengths under 700 mm show marginal improvements. Recommended operational speeds also increase to 0.6 m/s. Under standard conditions, a non-hardened Professional Range steel slide typically achieves approximately 100,000 cycles at 75% load capacity, provided correct installation, appropriate operational speeds, optimal environmental conditions, and adherence to recommended maintenance schedules are maintained (refer to the Technical Maintenance Document for additional information). Hardening the raceways to 58–62 HRC and utilizing chromed steel ball bearings substantially reduces wear and significantly extends service life. With proper maintenance and operational standards, life expectancy can exceed 500,000 cycles. While our engineers can assist OEM design programs with comprehensive FEA analysis, we highly recommend conducting in situ testing within your production facility before finalizing your design for manufacturing.

Material: All steel components.

Beams: Cold-drawn carbon steel C45E+C (EN 10277), featuring precision-milled raceways.

Ball Cages: Zinc-plated steel sheet, laser-cut profiles.

Ball Bearings: C85, G100 according to DIN 5401 standards (chromed).

End Bolts: ASTM A307 compliant.

Surface Protection: Electrolytic alkaline zinc coating (10–12 microns), compliant with DIN EN ISO 9227 neutral salt spray testing—no white rust appearance within 250 hours and no red rust appearance within 1,100 hours.

Temperature Range: Suitable for temperatures from -20°C to +250°C, provided proper lubricants are applied and beams are mounted freely to accommodate thermal expansion.

Lubrication: We apply and recommend lithium-based EP3 grease for standard applications. Special high- or low-temperature greases are available upon request.

Clean Room Requirements: Slides can be delivered unlubricated, allowing customers to perform sterilization and apply specialized greases post-production.

Thread Pitches: Coarse, as specified in the end profile image.



Important Safety Notice

Do not disassemble the slide!

The stated maximum safe working load applies to a fully extended pair of slides mounted in the upright position. Ensure all provided fixing holes are utilized, and distribute the load evenly along the inner beam. Slide deflection is calculated at a maximum of 2% of the slide's closed length when operating at or near full load capacity.

