
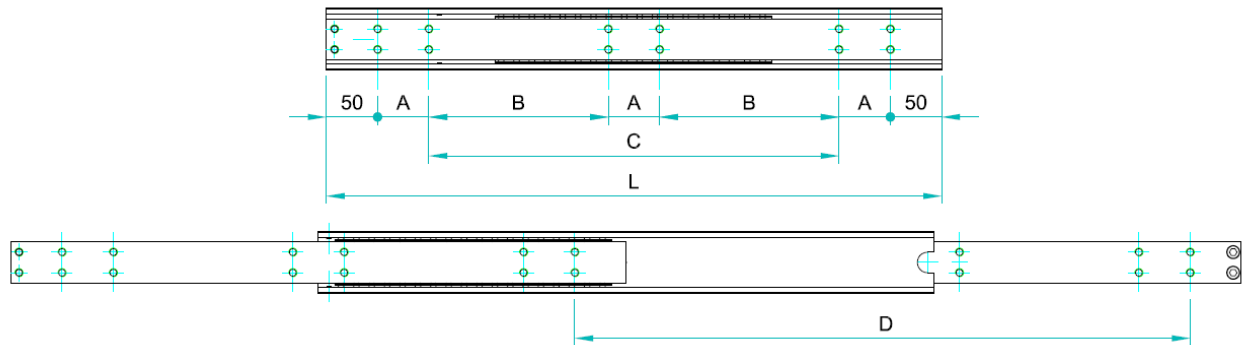



Options:

- "H" – Hardened raceways
- "V" - V shape channel raceways
- "F" - one outer beam countersunk
- "FF" - both outer beams countersunk
- "SB" - stainless steel ball bearings
- "SC" - stainless steel ball cages
- "SA" - stainless steel stopping pins and bolts

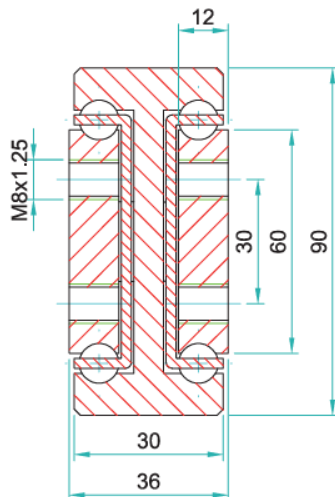

DTS-9036 weights 19.8 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
DTS9036.0200	200	200	650	50	-	-
DTS9036.0250	250	250	720	50	-	50
DTS9036.0300	300	300	780	50	-	100
DTS9036.0350	350	350	830	50	-	150
DTS9036.0400	400	400	860	50	-	200
DTS9036.0450	450	450	890	50	-	250
DTS9036.0500	500	500	940	50	-	300
DTS9036.0550	550	550	960	50	-	350
DTS9036.0600	600	600	980	50	-	400
DTS9036.0650	650	650	1000	50	200	-
DTS9036.0700	700	700	1030	50	225	-
DTS9036.0750	750	750	1040	50	250	-
DTS9036.0800	800	800	1050	50	275	-
DTS9036.0850	850	850	1045	50	300	-
DTS9036.0900	900	900	1030	50	325	-
DTS9036.0950	950	950	1015	50	350	-
DTS9036.1000	1000	1000	995	50	375	-
DTS9036.1050	1050	1050	980	50	400	-
DTS9036.1100	1100	1100	950	50	425	-
DTS9036.1150	1150	1150	920	50	450	-
DTS9036.1200	1200	1200	900	50	475	-
DTS9036.1250	1250	1250	880	50	500	-
DTS9036.1300	1300	1300	850	50	525	-
DTS9036.1350	1350	1350	820	50	550	-

**Do not dismantle the slide!**

The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
 Flat mounting: Reduce the load by 60-80%.
 We recommend the use of strong L brackets for under or floor mount.
 Deflection is calculated at approx. 1% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

Type: DTS-9036 weights 19.8 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
DTS9036.1400	1400	1400	790	50	575	-
DTS9036.1450	1450	1450	740	50	600	-
DTS9036.1500	1500	1500	710	50	625	-
DTS9036.1550	1550	1550	690	50	650	-
DTS9036.1600	1600	1600	660	50	675	-
DTS9036.1650	1650	1650	640	50	700	-
DTS9036.1700	1700	1700	620	100	650	-
DTS9036.1750	1750	1750	580	100	675	-
DTS9036.1800	1800	1800	540	100	700	-
DTS9036.1850	1850	1850	500	100	725	-
DTS9036.1900	1900	1900	470	100	750	-
DTS9036.1950	1950	1950	440	100	775	-
DTS9036.2000	2000	2000	420	100	800	-
DTS9036.2050	2050	2050	410	100	825	-
DTS9036.2100	2100	2100	400	100	850	-
DTS9036.2150	2150	2150	390	100	875	-
DTS9036.2200	2200	2200	380	100	900	-
DTS9036.2250	2250	2250	370	100	925	-
DTS9036.2300	2300	2300	360	100	950	-
DTS9036.2350	2350	2350	350	100	975	-
DTS9036.2400	2400	2400	340	100	1000	-
DTS9036.2450	2450	2450	330	100	1025	-
DTS9036.2500	2500	2500	320	100	1050	-

Indirect Axis (Flat) Mounting: As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

Hardened Raceways Option: Via an accurate laser process, the raceways can be hardened to 58-62HRC without increasing production lead-times. This maximizes tensile strength, reduces friction coefficient, minimizes operational forces and substantially increases the life cycles. Load capacities for lengths under 700mm are marginally increased. Recommended operating speeds increase to 0.6m/s. A non-hardened Professional Range steel slide can be expected to achieve 100,000 cycles at 75% load capacity in a lifetime, following correct mounting, operational speeds, working environment and regular raceway cleaning with a re-lubrication schedule. (Download the Technical Maintenance Document for further information). Hardening raceways to achieve 58-62HRC and replicating the chromed steel ball bearings, results in substantially less wear and prolonged service life. Following the same maintenance schedule and operational conditions, lifespan can be anticipated to surpass 500,000 cycles. Our engineers can support OEM design programs with FEA analysis; however, we recommend in situ testing within the fabrication before committing to production.

Material: All steel parts.

Beams: Cold drawn carbon steel C45E+C, - EN 10277, milled raceways.

Ball cages: Zinc plated sheet steel. Laser cut profiles.

Ball bearings: C85, G100: DIN 5401 (Chromed).

End Bolts: ASTM A307.

Steel surface protection: Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 250 hours. No red rust appearance within 1,100 hours

Temperature range: Steel slides –20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion

Lubrication: We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request

Clean Room Requirement: The slides will be supplied unlubricated for the customer to sterilize and apply specialist grease after production

Thread pitches: As per end profile image - coarse

