



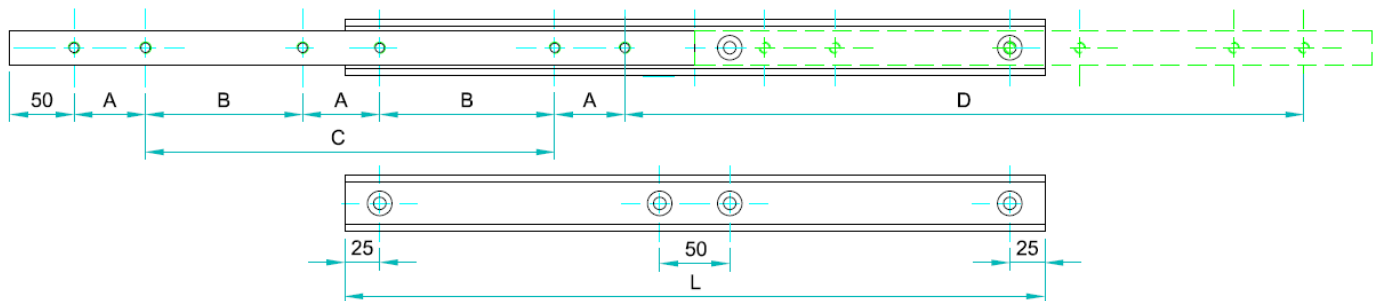

Options:

- "H" – Hardened raceways
- "V" - V shape channel raceways
- "F" - one outer beam countersunk
- "SB"- stainless steel ball bearings
- "SC"- stainless steel ball cages
- "SA"- stainless steel stopping pins and bolts

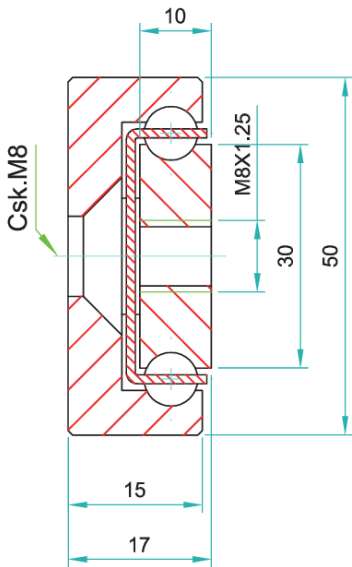

OWST-5017 weights 5.5 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
OWST5017.0200	200	100	330	50	-	-
OWST5017.0250	250	125	340	50	-	50
OWST5017.0300	300	150	360	50	-	100
OWST5017.0350	350	175	380	50	-	150
OWST5017.0400	400	200	400	50	-	200
OWST5017.0450	450	225	420	50	-	250
OWST5017.0500	500	250	440	50	-	300
OWST5017.0550	550	275	460	50	150	-
OWST5017.0600	600	300	470	50	175	-
OWST5017.0650	650	325	480	50	200	-
OWST5017.0700	700	350	485	50	225	-
OWST5017.0750	750	375	475	50	250	-
OWST5017.0800	800	400	460	50	275	-
OWST5017.0850	850	425	450	50	300	-
OWST5017.0900	900	450	435	50	325	-
OWST5017.0950	950	475	420	50	350	-
OWST5017.1000	1000	500	400	50	375	-
OWST5017.1050	1050	525	385	50	400	-
OWST5017.1100	1100	550	365	50	425	-
OWST5017.1150	1150	575	340	50	450	-
OWST5017.1200	1200	600	320	50	475	-

**Do not dismantle the slide!**

The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
 Flat mounting: Reduce the load by 60-80%.
 We recommend the use of strong L brackets for under or floor mount.
 Deflection is calculated up to 1% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

OWST-5017 weights 5.5 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
OWST5017.1250	1250	625	300	50	500	-
OWST5017.1300	1300	650	280	50	525	-
OWST5017.1350	1350	675	270	50	550	-
OWST5017.1400	1400	700	260	50	575	-
OWST5017.1450	1450	725	250	50	600	-
OWST5017.1500	1500	750	240	50	625	-
OWST5017.1550	1550	775	230	50	650	-
OWST5017.1600	1600	800	220	50	675	-
OWST5017.1650	1650	825	200	50	700	-
OWST5017.1700	1700	850	180	100	650	-
OWST5017.1750	1750	875	160	100	675	-
OWST5017.1800	1800	900	140	100	700	-
OWST5017.1850	1850	925	120	100	725	-
OWST5017.1900	1900	950	100	100	750	-
OWST5017.1950	1950	975	80	100	775	-
OWST5017.2000	2000	1000	70	100	800	-

Indirect Axis (Flat) Mounting: As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

Hardened Raceways Option: Via an accurate laser process, the raceways can be hardened to 58-62HRC without increasing production lead-times. This maximizes tensile strength, reduces friction coefficient, minimizes operational forces and substantially increases the life cycles. Load capacities for lengths under 700mm are marginally increased. Recommended operating speeds increase to 0.6m/s. A non-hardened Professional Range steel slide can be expected to achieve 100,000 cycles at 75% load capacity in a lifetime, following correct mounting, operational speeds, working environment and regular raceway cleaning with a re-lubrication schedule. (Download the Technical Maintenance Document for further information). Hardening raceways to achieve 58-62HRC and replicating the chromed steel ball bearings, results in substantially less wear and prolonged service life. Following the same maintenance schedule and operational conditions, lifespan can be anticipated to surpass 500,000 cycles. Our engineers can support OEM design programs with FEA analysis; however, we recommend in situ testing within the fabrication before committing to production.

Material: All steel parts.

Beams: Cold drawn carbon steel C45E+C, - EN 10277, milled raceways.

Ball cages: Zinc plated sheet steel. Laser cut profiles.

Ball bearings: C85, G100: DIN 5401 (Chromed).

End Bolts: ASTM A307.

Steel surface protection: Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 250 hours. No red rust appearance within 1,100 hours

Temperature range: Steel slides –20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion

Lubrication: We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request

Clean Room Requirement: The slides will be supplied unlubricated for the customer to sterilize and apply specialist grease after production

Thread pitches: As per end profile image - coarse

