



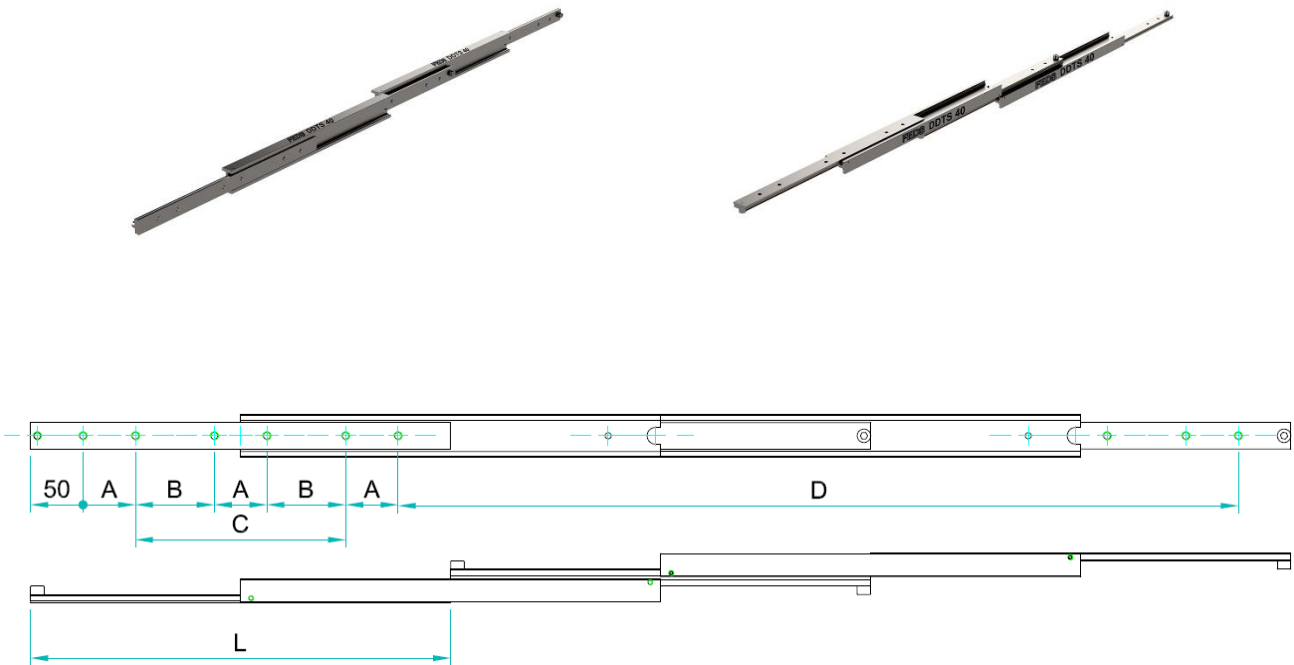

Options:

- "H" – Hardened raceways
- "V" - V shape channel raceways
- "F" - one outer beam countersunk
- "FF"- both outer beams countersunk
- "SB"- stainless steel ball bearings
- "SC"- stainless steel ball cages
- "SA"- stainless steel stopping pins and bolts

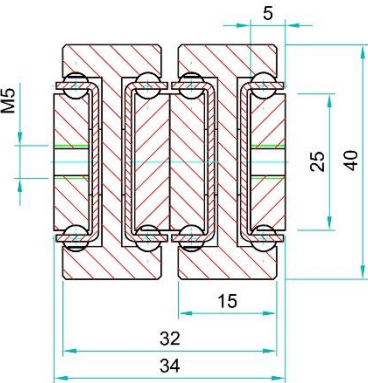

DDTS-4034 weights 7.93 kg/m				Hole pattern		
Article number	Installation length: L	Extension length: D	Load per pair: kg	"A"	"B"	"C"
DDTS4034.0200	200	400	75	50	-	-
DDTS4034.0250	250	500	80	50	-	50
DDTS4034.0300	300	600	85	50	-	100
DDTS4034.0350	350	700	90	50	-	150
DDTS4034.0400	400	800	85	50	-	200
DDTS4034.0450	450	900	80	50	-	250
DDTS4034.0500	500	1000	75	50	-	300
DDTS4034.0550	550	1100	70	50	150	-
DDTS4034.0600	600	1200	65	50	175	-
DDTS4034.0650	650	1300	60	50	200	-
DDTS4034.0700	700	1400	55	50	225	-
DDTS4034.0750	750	1500	50	50	250	-
DDTS4034.0800	800	1600	45	50	275	-
DDTS4034.0850	850	1700	40	50	300	-
DDTS4034.0900	900	1800	35	50	325	-
DDTS4034.0950	950	1900	30	50	350	-
DDTS4034.1000	1000	2000	20	50	375	-



Do not dismantle the slide!

The maximum safe working load is stated for fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.
Flat mounting: Reduce the load by 60-80%.
We recommend the use of strong L brackets for under or floor mount.
Deflection is calculated up to 2% of the closed length, at or near full load capacity.

Installation tolerance:

Closed length Tolerance: DIN2768 – c

Extension Tolerance: DIN2768 - c

Installation width tolerance + 0.4 to – 0.6mm

Indirect Axis (Flat) Mounting: As in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams, spaced 1,000mm apart. If load capacities need to be increased, or slides are fitted to extra-wide drawers, please contact us for technical advice.

Hardened Raceways Option: Via an accurate laser process, the raceways can be hardened to 58-62HRC without increasing production lead-times. This maximizes tensile strength, reduces friction coefficient, minimizes operational forces and substantially increases the life cycles. Load capacities for lengths under 700mm are marginally increased. Recommended operating speeds increase to 0.6m/s. A non-hardened Professional Range steel slide can be expected to achieve 100,000 cycles at 75% load capacity in a lifetime, following correct mounting, operational speeds, working environment and regular raceway cleaning with a re-lubrication schedule. (Download the Technical Maintenance Document for further information). Hardening raceways to achieve 58-62HRC and replicating the chromed steel ball bearings, results in substantially less wear and prolonged service life. Following the same maintenance schedule and operational conditions, lifespan can be anticipated to surpass 500,000 cycles. Our engineers can support OEM design programs with FEA analysis; however, we recommend in situ testing within the fabrication before committing to production.

Material: All steel parts.

Beams: Cold drawn carbon steel C45E+C, - EN 10277, milled raceways.

Ball cages: Zinc plated sheet steel. Laser cut profiles.

Ball bearings: C85, G100: DIN 5401 (Chromed).

End Bolts: ASTM A307.

Steel surface protection: Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 250 hours. No red rust appearance within 1,100 hours

Temperature range: Steel slides –20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion

Lubrication: We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request

Clean Room Requirement: The slides will be supplied unlubricated for the customer to sterilize and apply specialist grease after production

Thread pitches: As per end profile image - coarse

